




LIVE UP TO GOOD SUNSHINE

NKM-132 N-type (210mm Cell)

700-720 Watt

BIFACIAL MODULE

Industry-leading Warranty based on nominal power

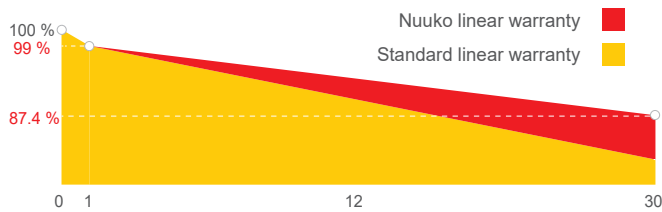

* 0.4% Annual Degradation over 30 Years

* 12 Year Product Warranty

* 30 Year Linear Power Warranty



Features



SMBB Technology

Better light trapping and current collection to improve module power output and reliability.



Hot 2.0 Technology

The N-type module with Hot 2.0 technology has better reliability and lower LID/LETID.



Excellent weak light performance

More power output in weak light condition, such as cloudy, morning and sunset



Extended wind and snow load tests

Module certified to withstand extreme wind (2400 Pascal) and snow loads (5400 Pascal) *



PID Resistance

Excellent Anti-PID performance guarantee via optimized mass-production process and materials control.




Lower LCOE

Higher bifaciality, higher power output and lower BOS cost

MECHANICAL SPECIFICATIONS

Cell Type	N type Mono-crystalline
Cell Dimensions	210*210mm
Cell Arrangement	132 (6*22)
Weight	37.5kg
Module Dimensions	2384*1303*33mm
Cable Length	Portrait 300mm/Landscape 1200mm/Customized
Cable Cross Section Size	TUV: 4mm ² /UL: 12AWG
Front Glass	2.0mm, Anti-Reflection Coating
Back Glass	2.0mm, Heat Strengthened Glass
No. of Bypass Diodes	3/6
Packing Configuration	33pcs/pallet, 594pcs/40hq
Frame	Anodized Aluminium Alloy
Junction Box	IP68

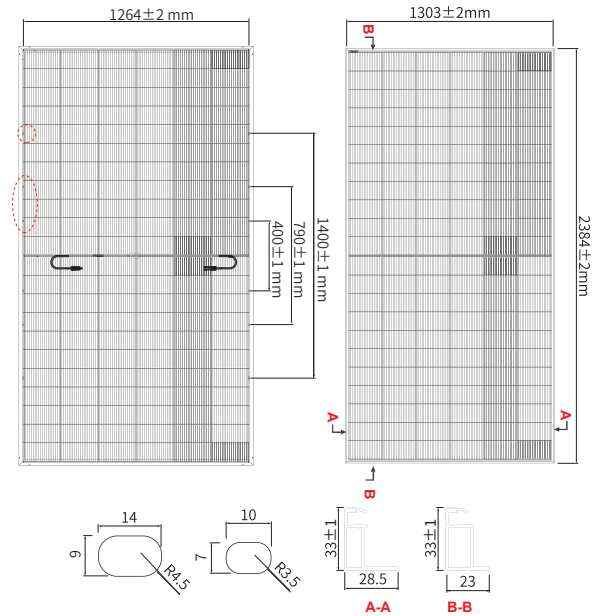

ELECTRICAL SPECIFICATIONS

Module Type	NKM700N-132BDG12		NKM705N-132BDG12		NKM710N-132BDG12		NKM715N-132BDG12		NKM720N-132BDG12	
	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Rated output (Pmp/Wp)	700	528	705	531	710	535	715	539	720	543
Maximum Power Voltage(Vmpp/V)	40.41	37.69	40.52	37.79	40.64	37.94	40.76	38.06	40.88	38.21
Maximum Power Current(Imp/A)	17.33	14.01	17.40	14.05	17.47	14.10	17.54	14.16	17.61	14.21
Open Circuit Voltage(Voc/V)	48.40	45.97	48.56	46.13	48.73	46.29	48.88	46.43	49.04	46.58
Short Circuit Current(Isc/A)	18.40	14.85	18.46	14.90	18.53	14.96	18.60	15.01	18.67	15.07
Module efficiency(%)	22.54%		22.70%		22.86%		23.02%		23.18%	
Power Tolerance (W)	0~+5		0~+5		0~+5		0~+5		0~+5	

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5 NMOT: Irradiance at 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s

MAXIMUM RATINGS

Maximum System Voltage	1500V DC (IEC)
Operating Temperature	-40°C ~ +85°C
Maximum Series Fuse	35A
Static Loading	Snow Loading: 5400Pa/ Wind Loading: 2400Pa
Conductivity at Ground	≤0.1Ω
Safety Class	II
Resistance	≥100MΩ

TEMPERATURE CHARACTERISTICS

NMOT Temperature	45°C±2°C
Temperature Coefficient (Pmax)	-0.29%/°C
Temperature Coefficient (Voc)	-0.25%/°C
Temperature Coefficient (Isc)	0.045%/°C



Nuuko Power Co., Ltd.
Info@nuukopower.com

CURVE & TEMPERATURE DEPENDENCE

